# d)ecrer

# GPA2-800

LOW IMPEDANCE  $(8/4/2\Omega)$ Stereo High-Efficiency Amplifier



# PRODUCT OVERVIEW

GPA2-800 is a stereo amplifier delivering 2 x 720 WRMS @ 4 ohm, and ready to drive 2 $\Omega$  loudspeaker loads (4 x 8 ohms loudspeakers in parallel, per channel). GPA is a series of stereo amplifiers that become a perfect and affordable option in many audio projects. A very high efficiency and an auto standby function provide these amplifiers with a true green profile.

## **KEY FEATURES**

- 2 analogue audio inputs x 2 powered audio outputs
- Euroblock output and speakon connectors
- 2 REMOTE volume ports (0-10VDC), compatible with WPm series wall panels
- High efficiency, auto standby function and convection cooling (fanless, 100% silent)
- BRIDGE mode ready
- Thermal protection
- Overload protection
- Anti-clip system

• Volume control knobs on front panel with protection cap, against undesired manipulation

# APPLICATIONS


- Clubs
- Theme restaurants
- Discos
- Leisure centres
- Cinemas and theatre
- Educational centres
- Boardrooms and conference halls
- Sports centres
- Mobile outdoor applications

## CERTIFICATIONS

- EN60065:2014
- EN55103-1:2009
- EN55103-2:2009
- 2006/95/EC
- 2004/108/CE



#### MECHANICAL DIAGRAMS

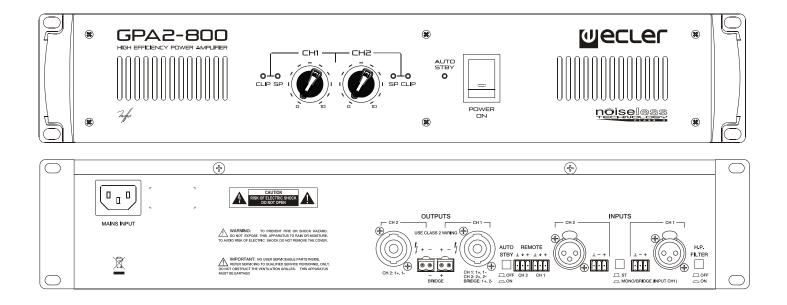

#### **TECHNICAL DATA**

| POWER 20-20kHz 1% THD                       |   |
|---|---|
| 1 Channel @ 4Ω                              | 640 WRMS  |
| 1 Channel @ 8Ω                              | 347 WRMS  |
| All Channels @ $4\Omega$                    | 575 WRMS  |
| 1 Channel @ 2.666Ω                          | 880 WRMS  |
| 1 Channel @ 2Ω                              | 1000  |
| 2 Bridged Channels @ 8Ω                     | 1150 WRMS   |
| Frequency response (-1 dB, -3dB)            | 20Hz - 55kHz  |
| Filter (High-Pass) 3rd order Butterworth    | 50Hz  |
| THD+Noise @ 1kHz Full Power                 | <0.05%  |
| Intermodulation distorsion 50Hz & 7kHz, 4:1 | <0.06%  |
| TIM 100                                     | <0.04%  |
| S+N/N 20Hz - 20kHz @ 1W/4Ω                  | >85dB   |
| CMRR  | >55dB   |
| Damping factor 1 kHz @ $8\Omega$            | >200  |
| Channel crosstalk @ 1kHz                    | >55dB   |
| Input Sensitivity / Impedance               | 0dB/<20kΩ   |
| Anticlip @ 2dBV input                       | <5% THD   |
| Mains voltage                               | 115V/230V. Voltage changed internally (NOT BY SWITCH) |
| Power consumption                           |   |
| pink noise, 1/8 power @ 4 $\Omega$          | 252W / 383VA  |
| pink noise, 1/3 power @ 4Ω                  | 613W  |
| Idle  | 47W   |
| STBY  | 16W   |
| Efficiency (typical)                        | 87%   |
| STBY time                                   | 90s   |
| Dimensions (Handle excluded)                | 482,6x88(2RU)x423mm / 19"x3.46"x16.65" (WxHxD)        |
| Weight                                      | 13,5 kg / 29.76 lb                                    |

All product characteristics are subject to variation due to production tolerances. NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications. Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 information@ecler.es www.ecler.com