

MPAGE1r

PAGING STATIONS

1-Zone Desktop Paging Station



PRODUCT OVERVIEW

MPAGE1r is a 1-zone desktop paging station, compatible with any device including a phantom-powered microphone input (SAM/eSAM series, DAM614, MIMO/MIMOSG series, CA series, HMA/eHMA series, etc.).



KEY FEATURES

- 1 zone paging station
- PAGE key
- “PAGE ACTIVE” trigger port (GPO), for its connection to external devices (NO/NC selectable)
- Internal connections for a secure wiring
- Gooseneck condenser microphone
- Windscreen and connectors included (microphone cable not included)

APPLICATIONS

- Paging, voice messages and speech

MECHANICAL DIAGRAMS

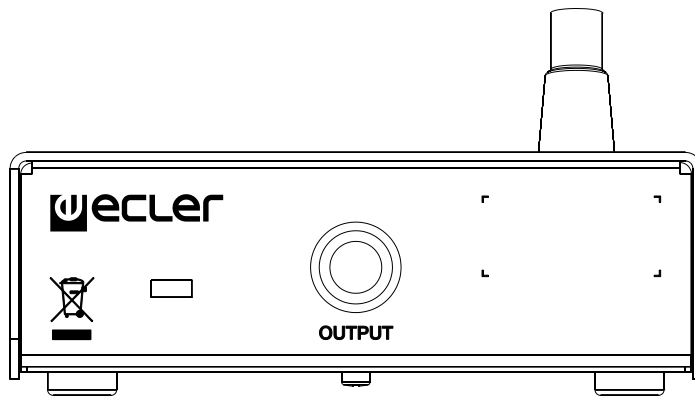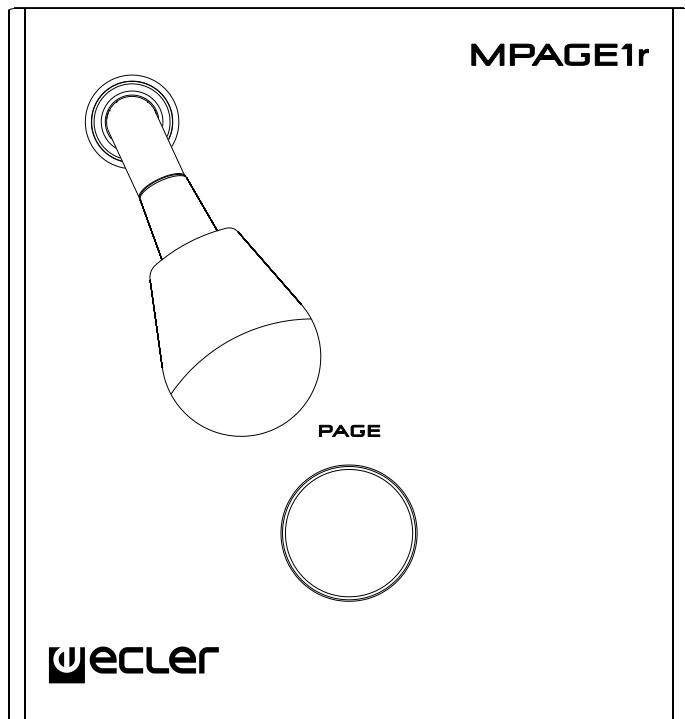

TECHNICAL DATA

Microphone type	Non-removable gooseneck condenser microphone
Polar pattern	Unidirectional
Microphone frequency response	50Hz – 18KHz (-10dB)
Output level	-24dBV @ 104dB SPL -34dBV @ 94dB SPL
SNR	70dB at 1kHz/1Pa
Page mute	80dB typ.
Audio output	Balanced, detachable 3 pole screw terminal
Maximum audio cable length	Twisted pair 5m; Shielded 60m
Control output	Open drain N channel mosfet N.C./N.O, internally selectable
Control rating	Max. +48VDC/0.1A
Control connector	Detachable 2 pole screw terminal
Phantom power supply	+10 to +48VDC
Power consumption	2mA
Dimensions WxDxH (microphone excluded)	120x126x43mm
Weight	625 g
Included accessories	Windscreen, connectors

All product characteristics are subject to variation due to production tolerances. NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.
 Motors, 166-168 08038 Barcelona - Spain - (+34) 932238403 information@ecler.es www.ecler.com