

AURA-2B1800

COMMERCIAL AMPLIFIERS

Two channels LoZ & HiZ Amplifier



PRODUCT OVERVIEW

AURA-2B1800 is two channels, 2x1800 W RMS @4 Ω , high efficiency amplifier (class D). Compatibility with both Low and Hi impedance configurations and supporting dual or bridge mode (@4/8 Ω). AURA Series are built with the highest robustness for long lasting performances with special power supply circuitry designed for optimized electrical consumption with fan cooling system. AURA Series also features the possibility of linking channels to the first input by selecting it on the rear panel, as well as auto stand-by, overload and thermal protection, PFC and anti-clipping system. The front panel volume knobs can be locked using rear panel switches for added security.

KEY FEATURES

- 2 analogue audio inputs and 2 x1800 WRMS @4 Ω powered audio outputs.
- Low (2, 4 and 8 Ω) and high impedance (70/100V) compatibility via rear panel switch.
- Supports dual or bridge mode (@4/8 Ω).
- Euroblock input and output connectors.
- Euroblock connectors with anti-pulling locking system.
- Link to input 1 available.
- The front panel volume control knobs can be locked using the rear panel switches for added security.
- High efficiency (Class D).
- Auto Standby function.
- Fan cooling.
- Thermal protection.
- Overload protection.
- Anti-clip system.

APPLICATIONS

- Retail
- Hospitality
- Education
- Corporate
- Leisure
- Sport & Wellness

TECHNICAL SPECIFICATIONS

AURA-2B1800

CHANNELS	
Number of Outputs channels	2
Output connection type	2-pin Euroblock. Pitch: 5,08 mm
Output configuration	2Ω, 4Ω, 8Ω, 100V, 70V and 4/8Ω in Bridge Mode
Number of Inputs channels	2
Input connection type	3-pin Euroblock, balanced, pitch 3,5 mm
Input configuration	Input link to CH1 selector per input
OUTPUT POWER All channels driven @1kHz @CF9dB @ 1%THD	
Max output power @ 8Ω	1000 W
Max output power @ 4Ω	1800 W
Max output power @ 2Ω	2400 W
Max output power @ 4Ω bridge mode	4600 W
Max output power @ 8Ω bridge mode	3400 W
Max output power @ 100V	1800 W
Max output power @ 70V	1800 W
OUTPUT POWER Single channel driven @1kHz @CF9dB @ 1%THD	
Max output power @ 8Ω	1000 W
Max output power @ 4Ω	1800 W
Max output power @ 2Ω	2400 W
Max output power @ 100V	1800 W
Max output power @ 70V	1800 W
SIGNAL	
Voltage gain	36 dB
Input sensitivity	0 dBV 2,21 dBu 1 Vrms
Input impedance	20kΩ balanced
Max input level	+20,4dBV 22,6 dBu
Frequency response	15Hz - 30kHz (-3dB, 1W any load)
THD + Noise	<0,1% (@1kHz, from 0,1W to Full Power)
SNR	106 dBA
Crosstalk	>80dB (@1kHz)
CMRR	> 55 Typ (from 20Hz to 20kHz)
ELECTRICAL	
Power supply	Universal, regulated SMPS with PFC
AC mains requirement	100-240 V @ 50-60Hz (±10%)
Power factor correction	> 0,95 (Output Power > 500W)
AC mains connector	IEC C14 inlet
POWER & HEAT @230VAC	
1/4 POWER, @ 4Ω (all channels driven)	
Power	1086,5 W 1134,0 VA
Current Draw	5,16 Arms
Thermal Loss	160,4 kcal/h 636,5 BTU/h

1/8 POWER, @ 4Ω (all channels driven)	
Power	603,3W 643 VA
Current Draw	2,92 Arms
Thermal Loss	131,8 kcal/h 523,2 BTU/h
IDLE (all channels driven)	
Power	65,4 W 136 VA
Current Draw	0,62 Arms
Thermal Loss	56,2 kcal/h 223,2 BTU/h
SLEEP MODE (all channels driven)	
Power	2,8 W 71,4 VA
Current Draw	0,32 Arms
Thermal Loss	2,4 kcal/h 9,6 BTU/h

POWER & HEAT @120VAC

1/4 POWER, @ 4Ω (all channels driven)	
Power	1123 W 1139 VA
Current Draw	9,74 Arms
Thermal Loss	191,8 kcal/h 761,1 BTU/h
1/8 POWER, @ 4Ω (all channels driven)	
Power	613,5 W 627 VA
Current Draw	5,3 Arms
Thermal Loss	140,6 kcal/h 558,0 BTU/h
IDLE (all channels driven)	
Power	63,5 W 89 VA
Current Draw	0,73 Arms
Thermal Loss	54,6 kcal/h 216,7,6 BTU/h
SLEEP MODE (all channels driven)	
Power	1,3 W 26 VA
Current Draw	0,22 Arms
Thermal Loss	1,1 kcal/h 4,4 BTU/h



TECHNOLOGIES

Amplification technology	Class D
Energy saving	Auto standby function selectable
Efficiency	83% (1/4 POWER, @ 4Ω)
Cooling	2 fans
Maximum fan noise	57 dBA

PROTECTIONS	
AC protection	Yes
DC protection	Yes
HF protection	Yes
Short-circuit protection	Yes
Clip limiter	Yes
Thermal protection	Yes
LOCAL CONTROL	
Attenuators	Front panel knobs per channel VOL (default)/BYPASS option
Output mode settings	Back panel Dipswitch by pairs of channels BRIDGE/2Ω/4Ω/8Ω/70V/100V
RUN/SLEEP mode	Auto standby function Front panel button
Power ON/OFF	Front panel switch
SETTINGS	
Attenuators	Front panel knobs per channel
Output settings	2Ω/4Ω/8Ω/70V/100V/Bridge Mode output selection by pair of channels
Auto standby function	Front panel button
Auto standby threshold	-40dB
Auto standby time	90 seconds
Power ON/OFF	Front panel switch
MONITORING	
Signal Present	SIGNAL LED (Green) per channel
Clipping	CLIP LED (Red) per channel
Protect	TH/PROT LED (Red) per channel
Standby	AUTO STANDBY ON/OFF LED (Green) per unit
Standby / Mute	STANDBY (Orange) per channel
Limit	TH/PROT LED (Red)
Thermal	TH/PROT LED (Red) per channel
On	ON LED (Green) per unit
Link	LINK (White)
PHYSICAL	
Operating temperature	-20° to 40° C -4° to 104° F
Operating humidity	10-90% RH, non-condensing
Storage temperature	-40° to 70° C -40° to 158° F
Storage humidity	10-95% RH, non-condensing
Installation options	Rack 19" installation & desktop
Included accessories	EU power cord, UK,US and CN power cord adapters, IEC Power Cord, x2 Euroblock 3-pin connectors (Inputs), x1 Euroblock 4-pin connectors (Outputs), Warranty Card, Rear Rack Kit, 3M rubber foot (4pcs)
Dimensions (WxHxD)	484 x 44 x 411.6 mm / 19 x 1,73 x 16.20 in.
Weight	7.55 kg / 16.64 lb
Shipping dimensions (WxHxD)	590 x 80 x 590 mm / 23.23 x 3.15 x 23.23 in.
Shipping weight	10.65 kg / 23.48 lb

MECHANICAL DIAGRAM

Ecler AURA-2B1800 Mechanical Diagram

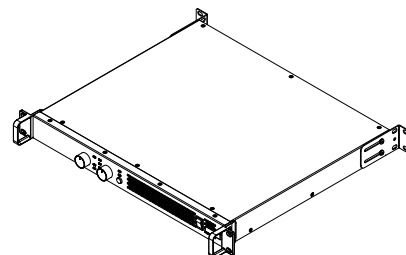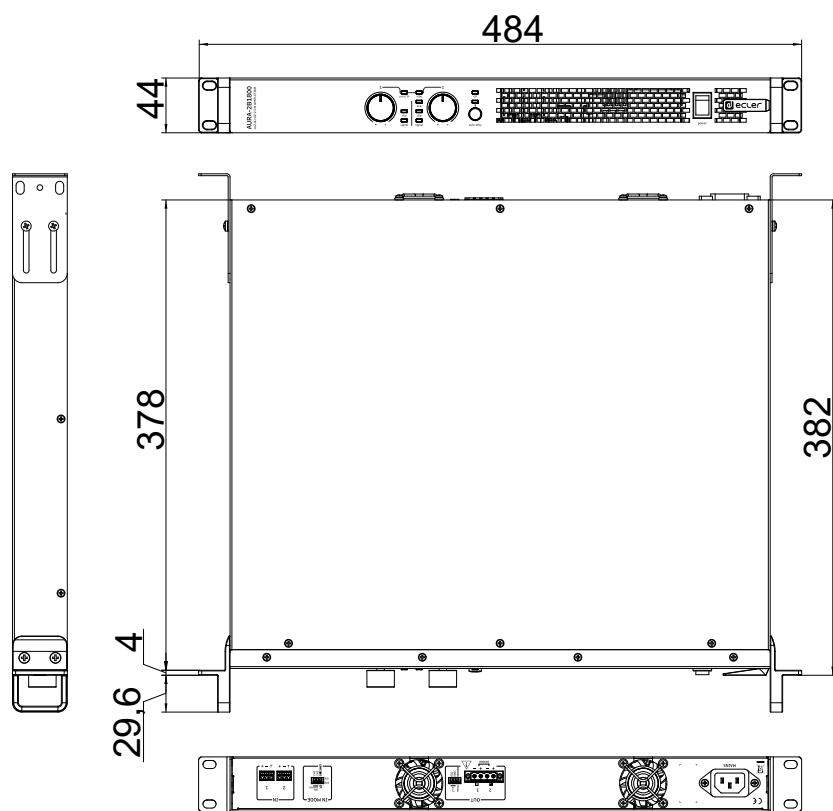

All the measurements are in mm

61-1218-0100

www.ecler.com



Motors, 166-168
08038 – Barcelona – Spain
www.ecler.com

All product characteristics are subject to variation due to production tolerances.

NEEC AUDIO BARCELONA S.L. reserves the right to make changes or improvements in the design or manufacturing that may affect these product specifications.

For technical queries contact your supplier, distributor or complete the contact form on our website, in **Support / Technical requests**.