

TOCA-40AT

WALL & DESKTOP CONTROL INTERFACES

Remote Wall Panel Control



PRODUCT OVERVIEW

TOCA-40AT is a line attenuator for 70 / 100 V systems, featuring an integrated priority relay activated by a 24 VDC signal. It offers a maximum output power of 40 W and is an ideal solution for zone control in public address and background music installations.

The TOCA Series is Ecler's new generation of remote control wall panels for audio systems, designed to seamlessly replace the WPa Series from 2026 onwards. Featuring a modern, elegant, and discreet aesthetic, TOCA panels offer intuitive control and easy installation, meeting the needs of both installers and end users.

Among the main improvements are updated electronics, compatibility with standard flush-mounted boxes, availability in black and white versions, and a high-quality acrylic surface. TOCA panels are designed to deliver reliability and ease of use, making them the ideal solution for professional audio environments where design, functionality, and installation flexibility are essential.

KEY FEATURES

- Integrated 24VDC priority relay.
- Compatibility with standard flush-mounted boxes (deep boxes only).
- High-quality acrylic surface.
- Available in white (RAL 9003) or black (RAL 9005).
- Optional double frame for installing two TOCA Series units side by side. Available in black (TOCA-2FRBK) or white (TOCA-2FRWH).

APPLICATIONS

- Retail
- Hospitality
- Education
- Corporate
- Sport & Wellness

ACCESSORIES & COMPATIBLE PRODUCTS

- TOCA-2FRWH
- TOCA-2FRBK



TECHNICAL SPECIFICATIONS




TOCA-40AT

SYSTEM		
	Number of output channels	1
	Number of input channels	1
LINE INPUTS		
	Input connection type	Push 2-pin, 70/100V line max 40W
LINE OUTPUTS		
	Output connection type	Push 2-pin, 70/100V line
MONITORING AND CONTROL		
	Buttons	Rotary attenuator, priority relay 24VDC
PHYSICAL		
	Type	Wall panel HIZ Attenuattor
	Format	Single Gang EU Format
	Installation options	Surface, In - wall
	Enclosure material	Acrylic front panel, plastic frame
	Operating temperature	Min: 0°C / 32°F Max: 35°C / 95°F
	Operating humidity	<85% HR
	Storage temperature	Min: -10°C / 14°F Max: 50°C / 122°F
	Storage humidity	<90% HR
	Finished colour	White (RAL 9003) / Black (RAL9005)
	Included accessories	-
	Optional accessories	Optional double frame for installing two TOCA Series units side by side. Available in black (TOCA-2FRBK) or white (TOCA-2FRWH).
	Dimensions (WxHxD)	80 x 80 x 45 mm / 3.15 x 3.15 x 1.77 in.
	Weight	0.33 kg / 0.73 lb
	Pieces per box	1
	Shipping dimensions (WxHxD)	150 x 110 x 100 mm / 5.91 x 4.33 x 3.94 in.
	Shipping weight	0.44 kg / 0.97 lb

MECHANICAL DIAGRAM



Ecler TOCA-40AT Mechanical Diagram

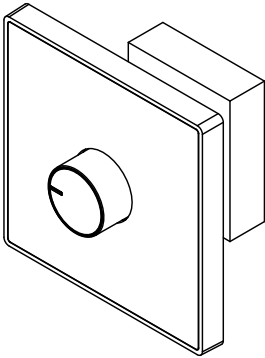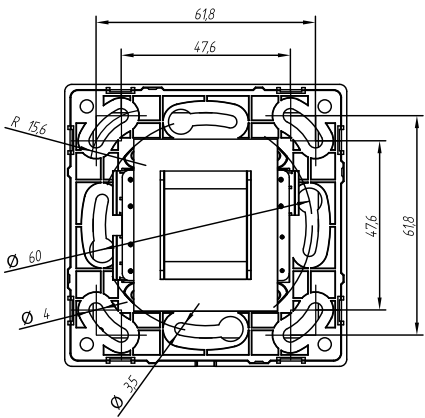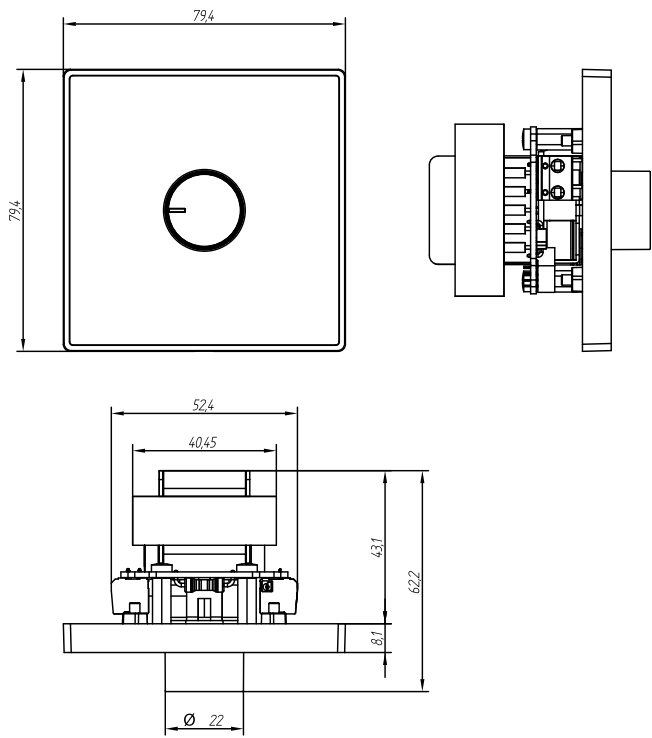


All the measurements are in mm

6I-1202-0100

www.ecler.com


INSTALLATION DIAGRAM

1

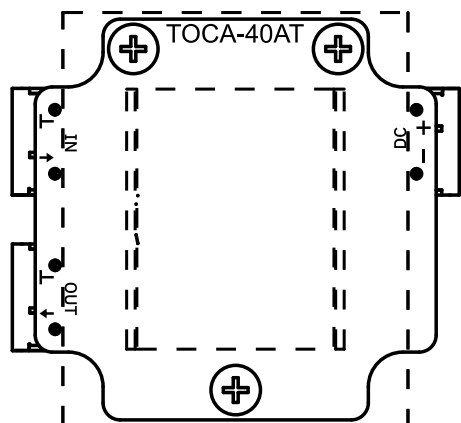


Check the wiring guide on the base of the device before connecting the wires.

2

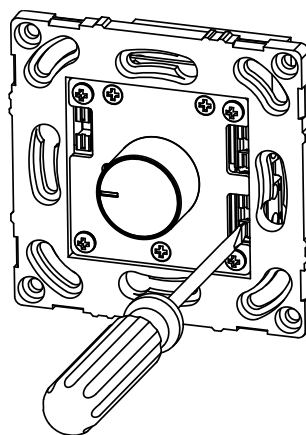


Using a screwdriver, press the connector release tabs to insert the wires.

3

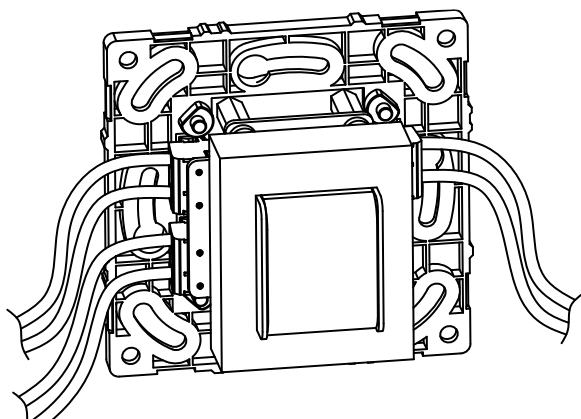


Connect the wires to the Euroblock connectors soldered into the device.

4

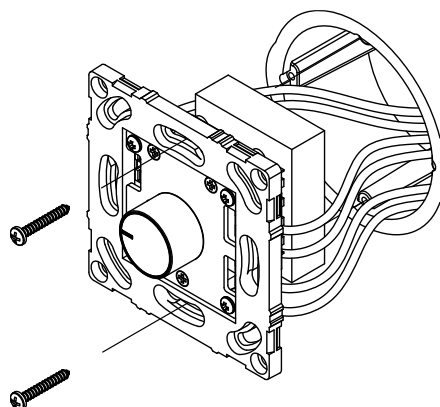


Secure the device to the surface-mount or flush-mount box using the appropriate screws. Mounting boxes and screws are not supplied.

5

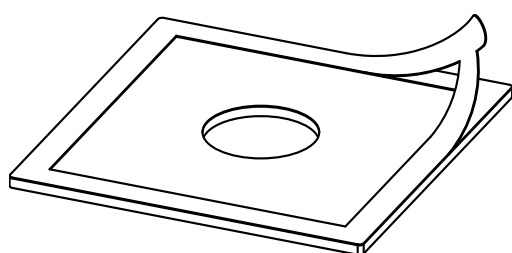


Remove the adhesive protective layer from the front panel cover

6

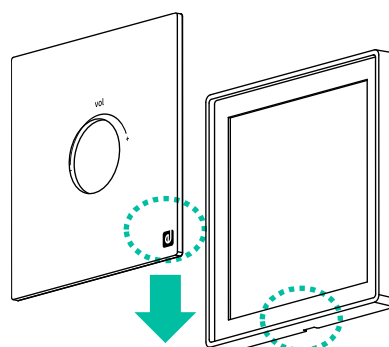


Carefully attach the front panel cover to the frame, ensuring that the slot in the frame is positioned at the bottom to allow for subsequent removal if necessary.

7

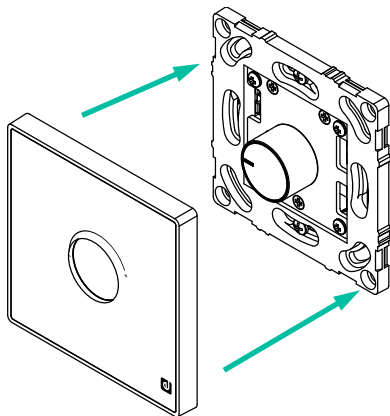

Once the front panel cover is attached to the frame, place both onto the device and press until they snap into place with an audible click.

8

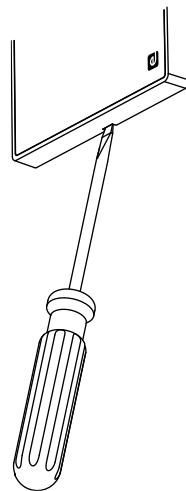

 To remove the front panel after installation, insert a flat-head screwdriver into the slot located at the bottom of the frame and gently lever it outward to release it.