

TOCA-CXJRCA

WALL & DESKTOP CONTROL INTERFACES

Remote Wall Panel Connector



PRODUCT OVERVIEW

TOCA-CXJRCA is a wall-mounted audio interconnection panel featuring a stereo mini-jack connector and two RCA connectors on the front. It includes screw-type connectors on the rear, allowing for fast and secure installation without soldering.

The TOCA Series is Ecler's new generation of remote control wall panels for audio systems, designed to seamlessly replace the WPa Series from 2026 onwards. Featuring a modern, elegant, and discreet aesthetic, TOCA panels offer intuitive control and easy installation, meeting the needs of both installers and end users.

Among the main improvements are updated electronics, compatibility with standard flush-mounted boxes, availability in black and white versions, and a high-quality acrylic surface. TOCA panels are designed to deliver reliability and ease of use, making them the ideal solution for professional audio environments where design, functionality, and installation flexibility are essential.

KEY FEATURES

- 1 Stereo 1/8" plug connectors + 2 RCA connectors on the front.
- Compatibility with standard flush-mounted boxes.
- High-quality acrylic surface.
- Available in white (RAL 9003) or black (RAL 9005).
- Optional double frame for installing two TOCA Series units side by side. Available in black (TOCA-2FRBK) or white (TOCA-2FRWH).

APPLICATIONS

- Retail
- Hospitality
- Education
- Corporate
- Sport & Wellness

ACCESSORIES & COMPATIBLE PRODUCTS

- TOCA-2FRWH
- TOCA-2FRBK




TECHNICAL SPECIFICATIONS

TOCA-CXRJCA


SYSTEM	
Number of output channels	2
Number of input channels	2
Line INPUTS	
Input connection type	2 x Euroblock, 3-pin, stereo unbalanced
Line OUTPUTS	
Output connection type	3.5mm Jack + 2 RCA
PHYSICAL	
Type	Wall panel Inputs
Format	Single Gang EU Format
Installation options	Surface, In - wall
Enclosure material	Acrylic front panel, plastic frame
Operating temperature	Min: 0°C / 32°F Max: 35°C / 95°F
Operating humidity	<85% HR
Storage temperature	Min: -10°C / 14°F Max: 50°C / 122°F
Storage humidity	<90% HR
Finished colour	White (RAL 9003) / Black (RAL9005)
Included accessories	2x Euroblock connector
Optional accessories	Optional double frame for installing two TOCA Series units side by side. Available in black (TOCA-2FRBK) or white (TOCA-2FRWH).
Dimensions (WxHxD)	80 x 80 x 25 mm / 3.15 x 3.15 x 0.98 in.
Weight	0.1 kg / 0.22 lb
Pieces per box	1
Shipping dimensions (WxHxD)	150 x 110 x 100 mm / 5.91 x 4.33 x 3.94 in.
Shipping weight	0.21 kg / 0.46 lb

MECHANICAL DIAGRAM

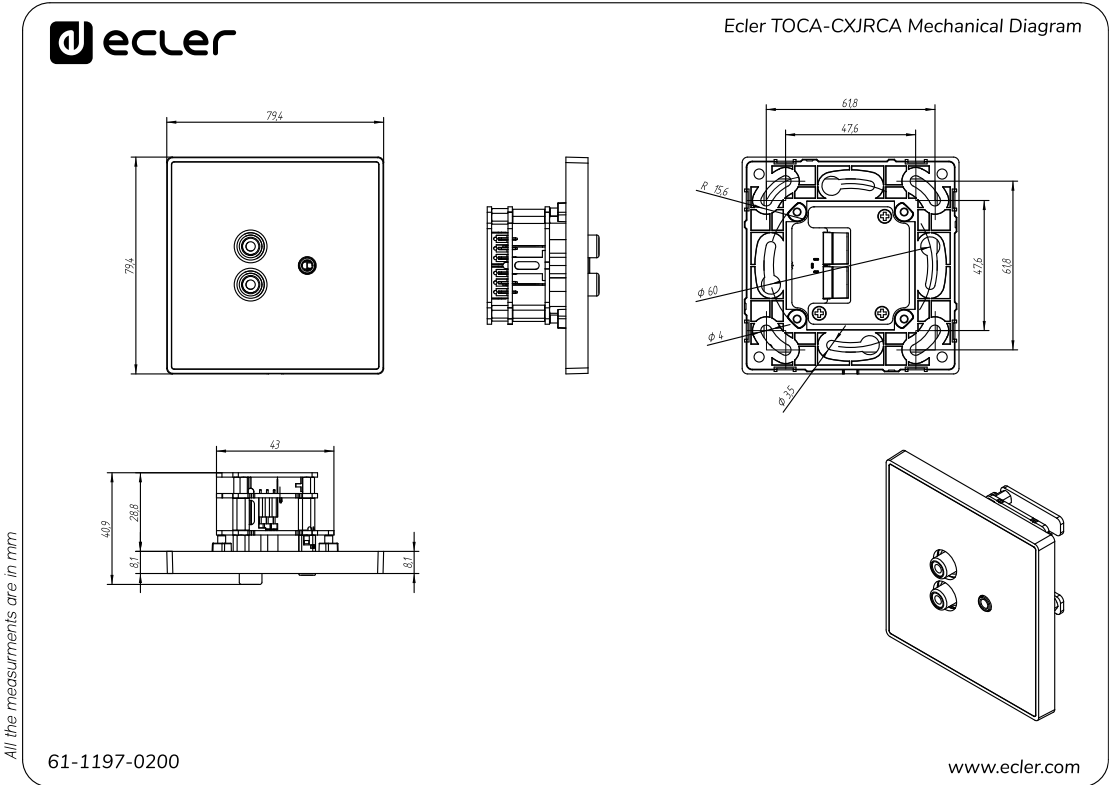


INSTALLATION DIAGRAM

1

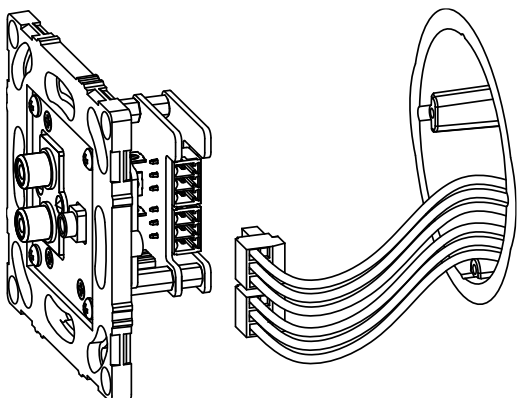


Connect the wires to the 2 supplied Euroblock connectors, then insert the 2 connectors to the device.
Refer to the Connection Diagram section for the appropriate wiring connections.

2

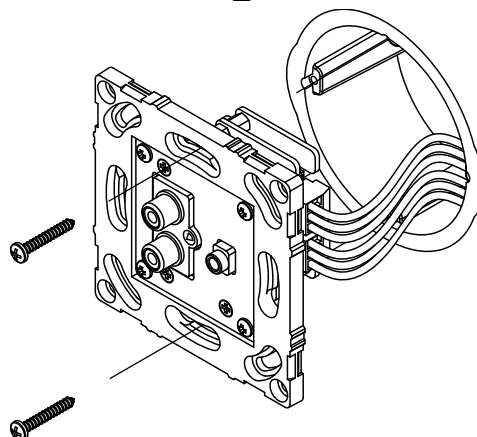


Secure the device to the surface-mount or flush-mount box using the appropriate screws (mounting boxes and screws not supplied).

3

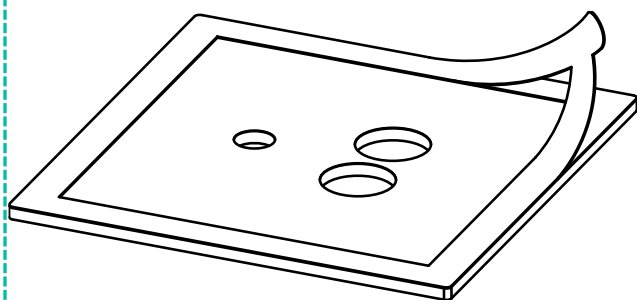


Remove the adhesive protective layer from the front panel cover

4

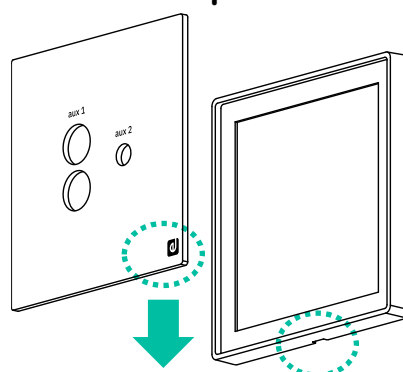


Carefully attach the front panel cover to the frame, ensuring that the slot in the frame is positioned at the bottom to allow for subsequent removal if necessary.

5

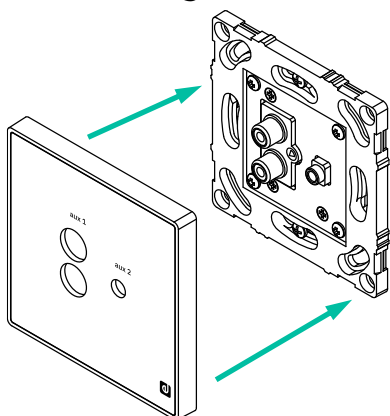


Once the front panel cover is attached to the frame, place both onto the device and press until they snap into place with an audible click.


6

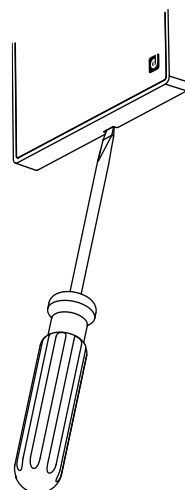

 To remove the front panel after installation, insert a flat-head screwdriver into the slot located at the bottom of the frame and gently lever it outward to release it.

CONNECTION DIAGRAM

Terminal Block Diagram (mini-jack / AUX1)		
Pin 1	RING	123 
Pin 2	SLEEVE	
Pin 3	TIP	

Terminal Block Diagram (RCA / AUX2)		
Pin 1	RIGHT CHANNEL	123 
Pin 2	GND	
Pin 3	LEFT CHANNEL	