

TOCA-VOL

WALL & DESKTOP CONTROL INTERFACES

Remote Wall Panel Control



PRODUCT OVERVIEW

TOCA-VOL is a wall-mounted remote control panel for volume management in professional audio systems. It is compatible with all devices featuring a 0–10 VDC and 0-12 VDC control input, providing precise, reliable, and intuitive audio level adjustment.

The TOCA Series is Ecler's new generation of remote control wall panels for audio systems, designed to seamlessly replace the WPa Series from 2026 onwards. Featuring a modern, elegant, and discreet aesthetic, TOCA panels offer intuitive control and easy installation, meeting the needs of both installers and end users.

Among the main improvements are updated electronics, compatibility with standard flush-mounted boxes, availability in black and white versions, and a high-quality acrylic surface. TOCA panels are designed to deliver reliability and ease of use, making them the ideal solution for professional audio environments where design, functionality, and installation flexibility are essential.

KEY FEATURES

- DIP switch configuration.
- Compatibility with standard flush-mounted boxes.
- High-quality acrylic surface.
- Available in white (RAL 9003) or black (RAL 9005).
- Optional double frame for installing two TOCA Series units side by side. Available in black (TOCA-2FRBK) or white (TOCA-2FRWH).

APPLICATIONS

- Retail
- Hospitality
- Education
- Corporate
- Sport & Wellness

ACCESSORIES & COMPATIBLE PRODUCTS

- TOCA-2FRWH
- TOCA-2FRBK




TECHNICAL SPECIFICATIONS

TOCA-VOL


SYSTEM	
Number of output channels	1
MONITORING AND CONTROL	
Buttons	Volume
PHYSICAL	
Type	Wall panel Volume control
Format	Single Gang EU Format
Installation options	Surface, In - wall
Enclosure material	Acrylic front panel, plastic frame
Operating temperature	Min: 0°C / 32°F Max: 35°C / 95°F
Operating humidity	<85% HR
Storage temperature	Min: -10°C / 14°F Max: 50°C / 122°F
Storage humidity	<90% HR
Finished colour	White (RAL 9003) / Black (RAL9005)
Included accessories	1x Euroblock connector
Optional accessories	Optional double frame for installing two TOCA Series units side by side. Available in black (TOCA-2FRBK) or white (TOCA-2FRWH).
Dimensions (WxHxD)	80 x 80 x 25 mm / 3.15 x 3.15 x 0.98 in.
Weight	0.1 kg / 0.22 lb
Pieces per box	1
Shipping dimensions(WxHxD)	150 x 110 x 100 mm / 5.91 x 4.33 x 3.94 in.
Shipping weight	0.21 kg / 0.46 lb

MECHANICAL DIAGRAM

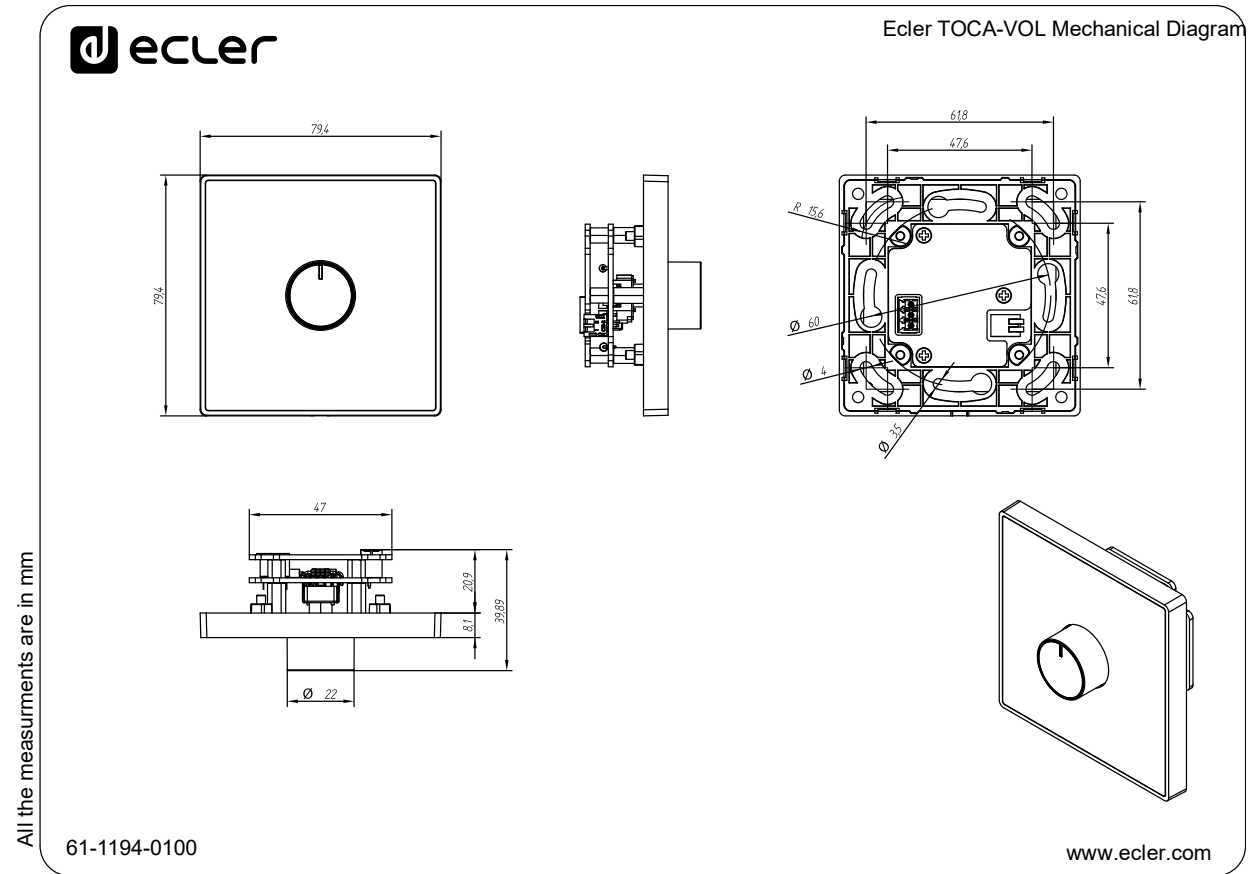


INSTALLATION DIAGRAM

1

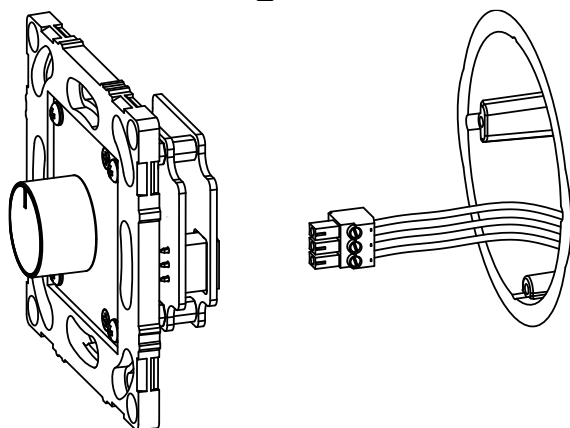


Connect the wires to the supplied Euroblock connector, then insert the connectors into the device. Refer to the DIP Switch Configuration section for the appropriate wiring connections.

2

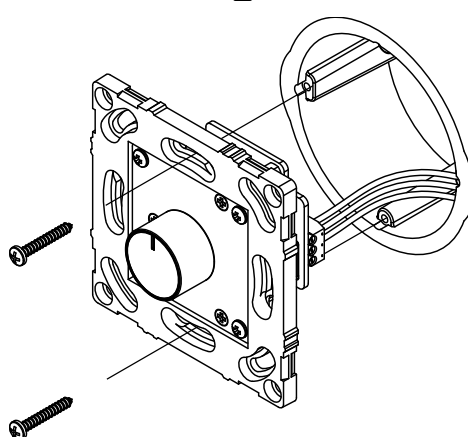


Secure the device to the surface-mount or flush-mount box using the appropriate screws (mounting boxes and screws not supplied).

3

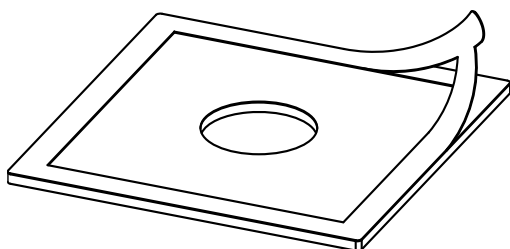


Remove the adhesive protective layer from the front panel cover

4

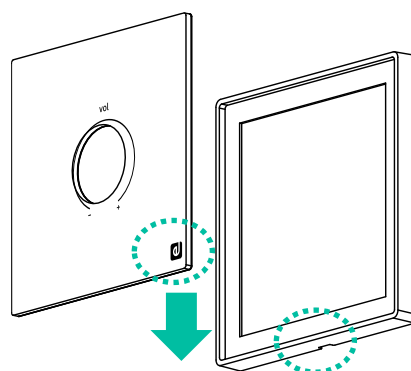


Carefully attach the front panel cover to the frame, ensuring that the slot in the frame is positioned at the bottom to allow for subsequent removal if necessary.

5

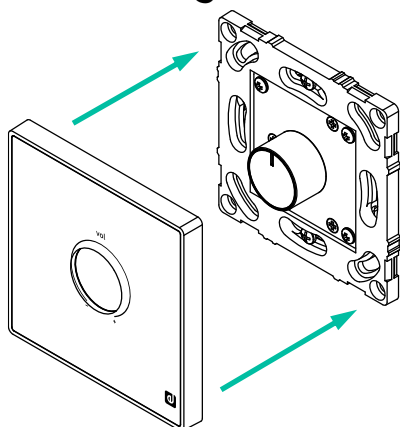

Once the front panel cover is attached to the frame, place both onto the device and press until they snap into place with an audible click.

6

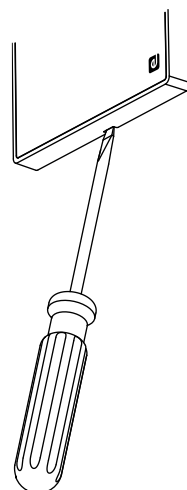

 To remove the front panel after installation, insert a flat-head screwdriver into the slot located at the bottom of the frame and gently lever it outward to release it.

DIP SWITCH CONFIGURATION

