

PAGE-X4

REMOTE CONTROLS & INTERFACES

Paging Stations



PRODUCT OVERVIEW

PAGE-X4 is a 4-inch touch paging console featuring analogue audio connectivity for the included gooseneck condenser microphone. Its touchscreen display provides an intuitive user interface and seamless integration with the EclerPLEX ecosystem.

KEY FEATURES

- Capacitive TFT touchscreen display.
- 4-inch display with 480 x 480 pixels resolution.
- Cardioid gooseneck condenser microphone included.
- High-pass-filter: 100 Hz, 18 dB/oct.
- 1 x RJ45 connector supporting Ethernet (PoE).
- 1 x 3-pin Euroblock connector (balanced MIC output, -32dB nominal).
- Powered via PoE or an external 24 VDC power supply (not included).
- Reset and Reboot micro buttons.
- Compatible with EclerPLEX.

APPLICATIONS

- Retail
- Hospitality
- Education
- Corporate
- Sport & Wellness

ACCESSORIES & COMPATIBLE PRODUCTS


- PSU-24V2A

TECHNICAL SPECIFICATIONS

PAGE-X4


SYSTEM	
Number of output channels	1 Mic Balanced
Number of input channels	1 Mic Balanced
Number of paging zones	Configurable via Ecler PLEX
Processor	Quad-Core ARM, up to 1.8GHz
MIC INPUTS	
Microphone type	Condenser
Polar pattern	Cardioid
Frequency response	80Hz-18KHz
Sensitivity	-32dB (0dB=1V/Pa at 1 kHz)
Phantom power	11 - 52 VDC (5mA typ.)
Input connection type	XLR
Filters	High-pass-filter: 100 Hz, 18 dB/oct
SCREEN/DISPLAY	
Size	4"
Resolution	480 x 480 pixels
Contrast Ratio	800:1
Brightness	350 cdm2
Scale	1:1
Display	4" IPS Active area 71.86(W) x 70.18(H) mm
Backlight	LED
Touch-panel	5 points capacitive touch panel
MONITORING AND CONTROL	
Buttons	Reboot and Factory Reset micro buttons
CONNECTIVITY	
Ethernet	1 x RJ45 connector, cable: Cat-5e or better 10 /100Mb, 1GB Auto X-Over Supports PoE
Programming and control	Ecler PLEX Guest for Panels
ELECTRICAL	
Power supply	DC 12V-24V 2A & PoE (Power Supply Not Included)
PoE	Class 0 802.3af Poe PD compliant
Max power consumption	6W
PHYSICAL	
Type	Control touch panel
Format	Desktop Paging Station
Installation options	Desktop
Operating temperature	Min: -10°C / 14°F Max: 60°C / 140°F
Operating humidity	≤75% HR
Storage temperature	Min: -20°C / -4°F Max: 70°C / 158°F
Storage humidity	≤75% HR
Included accessories	3-pin Euroblock Connector
Optional accessories	PSU-24V2A
Dimensions (WxHxD)	120 x 100 x 95 mm / 4.72 x 3.94 x 3.74 in.
Weight	0.45 Kg / 0.99 lb
Shipping dimensions (WxHxD)	430 x 115 x 165 mm / 16.93 x 4.53 x 6.50 in.
Shipping weight	0.93 Kg / 2.05 lb

MECHANICAL DIAGRAM

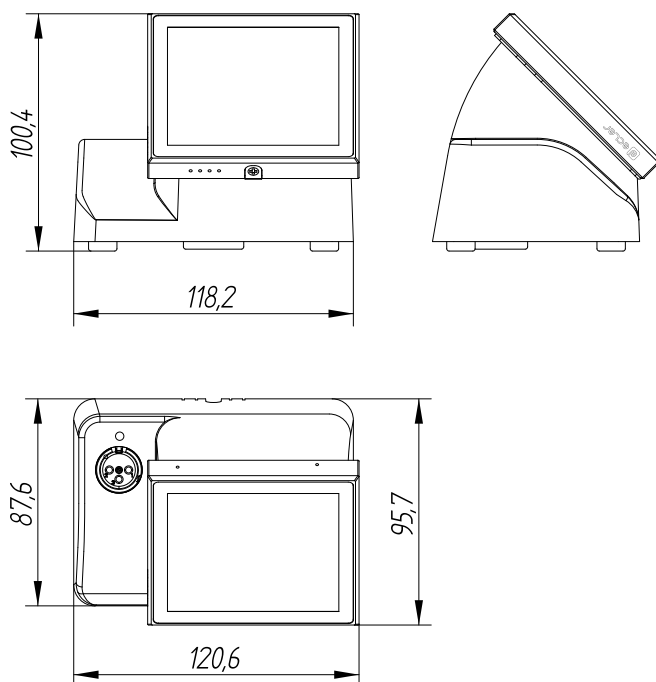

All the measurements are in mm

61-1238-0100

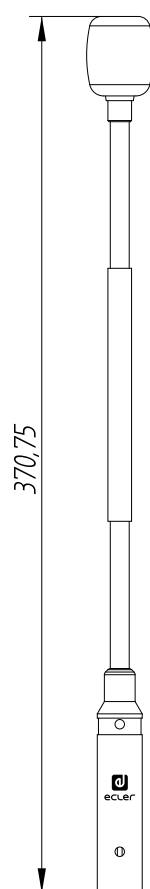

Ecler PAGE-X4 Mechanical Diagram

www.ecler.com