AURA-4B150

COMMERCIAL AMPLIFIERS

Multichannel LoZ & HiZ Amplifier



PRODUCT OVERVIEW

AURA-4B150 is a multichannel 4x150 W RMS @4Ω, high efficiency amplifier (class D). Compatibility with both Low and Hi impedance configurations and supporting dual or bridge mode (@4/8Ω). AURA Series are built with the highest robustness for long lasting performances with special power supply circuitry designed for optimized electrical consumption with fan cooling system. AURA Series also features the possibility of linking channels to the first input by selecting it on the rear panel, as well as auto stand-by, overload and thermal protection, PFC and anti-clipping system. The front panel volume knobs can be locked using rear panel switches for added security.

KEY FEATURES

- 4 analogue audio inputs and 4x150 WRMS @4Ω powered audio outputs.
- Low (2, 4 and 8Ω) and high impedance (70/100V) compatibility via rear panel switch.
- Supports dual or bridge mode (@4/8Ω).
- Euroblock input and output connectors.
- Euroblock connectors with anti-pulling locking system.
- Link to input 1 available.
- The front panel volume control knobs can be locked using the rear panel switches for added security.
- High efficiency (Class D).
- Auto Standby function.
- Fan cooling.
- Thermal protection.
- Overload protection.
- Anti-clip system.

APPLICATIONS

- Retail
- Hospitality
- Education
- Corporate
- Leisure
- Sport & Wellness
- Retail

TECHNICAL SPECIFICATIONS

AURA-4B150

CHANNELS	
Number of Outputs channels	4
Output connection type	4-pin Euroblock. Pitch: 5,08 mm
Output configuration	2Ω, 4Ω, 8Ω, 100V, 70V and 4/8Ω in Bridge Mode
Number of Inputs channels	4
Input connection type	3-pin Euroblock, balanced, pitch 3,5 mm
Input configuration	Input link to CH1 selector per input
OUTPUT POWER All channels driven @1kHz @CF9dB @ 1%THD	
Max output power @ 8Ω	150 W
Max output power @ 4Ω	150 W
Max output power @ 2Ω	150 W
Max output power @ 4Ω bridge mode	300 W
Max output power @ 8Ω bridge mode	300 W
Max output power @ 100V	150 W
Max output power @ 70V	150 W
OUTPUT POWER Single channel driven @1kHz @CF9dB @ 1%THD	
Max output power @ 8Ω	150 W
Max output power @ 4Ω	150 W
Max output power @ 2Ω	150 W
Max output power @ 4Ω bridge mode	300 W
Max output power @ 8Ω bridge mode	300 W
Max output power @ 100V	150 W
Max output power @ 70V	150 W
SIGNAL	
Voltage gain	34 dB
Input sensitivity	0 dBV
	2,21 dBu
	1 Vrms
Input impedance	20kΩ balanced
Max input level	+18dBV
	20,21 dBu
Frequency response	15Hz - 30kHz (-3dB, 1W any load)
THD + Noise	<0,1% (@1kHz, from 0,1W to Full Power)
SNR	90,6 dBA
Crosstalk	>70dB (@1kHz)
CMRR	> 55 Typ (from 20Hz to 20kHz)
ELECTRICAL	
Power supply	Universal, regulated SMPS with PFC
AC mains requirement	100-240 V @ 50-60Hz (±10%)
Power factor correction	> 0,77
AC mains connector	IEC C14 inlet
POWER & HEAT @230VAC	
1/4 POWER, @ 4Ω (all channels driven)	
Power	799,2 W
	859 VA
Current Draw	3,75 Arms
Thermal Loss	171,3 kcal/h
	679,9 BTU/h

1/8 POWER, @ 4Ω (all channels driven)	
Power	463,9 W
	516 VA
Current Draw	2,24 Arms
Thermal Loss	141,0 kcal/h
	559,4 BTU/h
IDLE (all channels driven)	
Power	60 W
	164,4 VA
Current Draw	0,70 Arms
Thermal Loss	51,6 kcal/h
	204,8 BTU/h
SLEEP MODE (all channels driven)	
Power	2,3 W
	81,4 VA
Current Draw	0,35 Arms
Thermal Loss	2,0 kcal/h
	7,8 BTU/h

POWER & HEAT @120VAC

1/4 POWER, @ 4Ω (all channels driven)	
Power	828,5 W
	844 VA
Current Draw	7,50 Arms
Thermal Loss	196,5 kcal/h
	779,8 BTU/h
1/8 POWER, @ 4Ω (all channels driven)	
Power	467,7 W
	489 VA
Current Draw	4,31 Arms
Thermal Loss	152,01 kcal/h
	603,1 BTU/h
IDLE (all channels driven)	
Power	99,4 W
	844 VA
Current Draw	1,02 Arms
Thermal Loss	85,5 kcal/h
	339,3 BTU/h
SLEEP MODE (all channels driven)	
Power	1,5 W
	23,9 VA
Current Draw	0,20 Arms
Thermal Loss	1,3 kcal/h
	5,01 BTU/h


TECHNOLOGIES

Amplification technology	Class D
Energy saving	Auto standby function selectable
Efficiency	50%
Cooling	2 fans
Maximum fan noise	57 dBA

PROTECTIONS	
AC protection	Yes
DC protection	Yes
HF protection	Yes
Short-circuit protection	Yes
Clip limiter	Yes
Thermal protection	Yes
LOCAL CONTROL	
Attenuators	Front panel knobs per channel VOL (default)/BYPASS option
Output mode settings	Back panel Dipswitch by pairs of channels BRIDGE/2Ω/4Ω/8Ω/70V/100V
RUN/SLEEP mode	Auto standby function Front panel button
Power ON/OFF	Front panel switch
SETTINGS	
Attenuators	Front panel knobs per channel
Output settings	2Ω/4Ω/8Ω/70V/100V/Bridge Mode output selection by pair of channels
Auto standby function	Front panel button
Auto standby threshold	-40dB
Auto standby time	90 seconds
Power ON/OFF	Front panel switch
MONITORING	
Signal Present	SIGNAL LED (Green) per channel
Clipping	CLIP LED (Red) per channel
Protect	TH/PROT LED (Red) per channel
Standby	AUTO STANDBY ON/OFF LED (Green) per unit
Standby / Mute	STANDBY (Orange) per channel
Limit	TH/PROT LED (Red)
Thermal	TH/PROT LED (Red) per channel
On	ON LED (Green) per unit
Link	LINK (White)
PHYSICAL	
Operating temperature	-20º to 40º C -4º to 104º F
Operating humidity	10-90% RH, non-condensing
Storage temperature	-40º to 70º C -40º to 158º F
Storage humidity	10-95% RH, non-condensing
Installation options	Rack 19" installation & desktop
Included accesories	1x EU & IEC power cords, UK,US & CN plug adapters, 4x Desktop feet, 1x Rack 19" installation hardware, 6x Euroblock connectors (4x 3-pin blue for inputs and 2x 4-pin green for outputs), 2x Euroblock jumper.
Dimensions (WxHxD)	484 x 44 x 296.6 mm / 19 x 1.73 x 11.67 in.
Weight	5 kg / 11,02 lb
Shipping dimensions (WxHxD)	590 x 80 x 474 mm / 23.23 x 3.15 x 18.66 in.
Shipping weight	7.6 kg / 16.76 lb

MECHANICAL DIAGRAM

Ecler AURA-4BI50 Mechanical Diagram

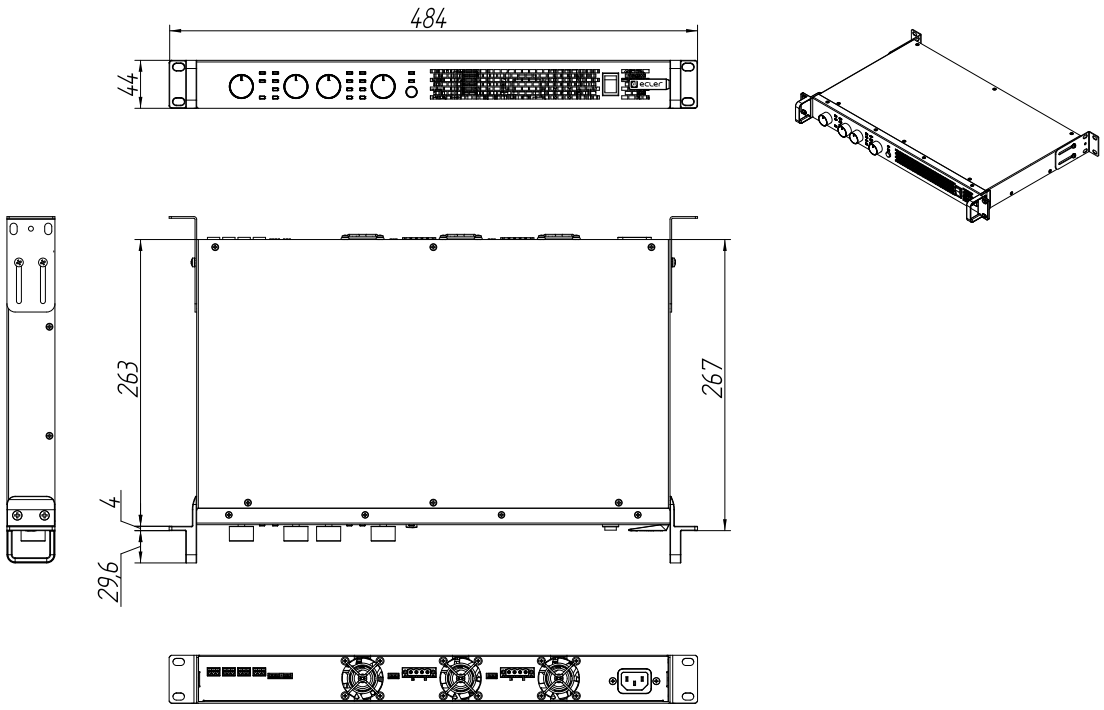

All the measurments are in mm

61-1228-0100

www.ecler.com